

Piezo Shower Control SLS 02P




Characteristics



- hygienic flush
- vandal-proof
- is destined for cold and hot water, temperature is regulated by mixer
- water flows after soft push of the piezo button
- water stops flowing after adjustable flowing time (can be set in 10 s - 310 s), standard 120 s
- water could be stopped by follow-up soft push of piezo button
- monitoring of battery capacity (for models with index B)
- parameter adjustment using by the remote control SLD 04

Installation Drawing

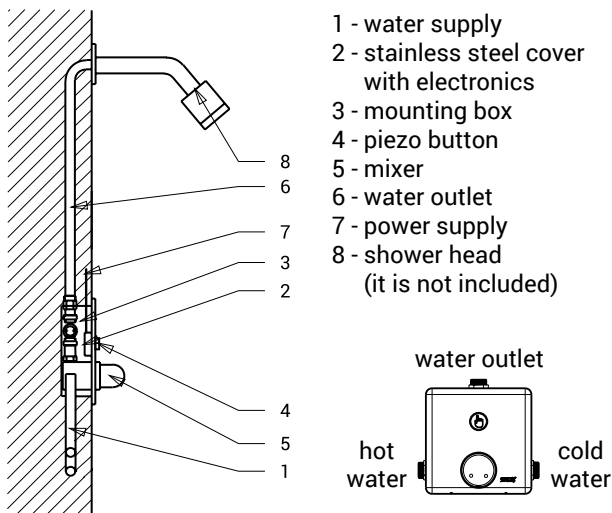

Technical Specification

| | |
|--|------------------------------------|
| Stainless steel cover dimension | 170 x 170 x 10 mm |
| Mounting box dimension | 155 x 160 x 70 mm |
| Operating voltage | |
| ▪ SLS 02P | 24 V DC |
| ▪ SLS 02PB | 6 V |
| Power input | |
| ▪ operating by 24 V DC | 7 W |
| ▪ operating by 6 V | 3 W |
| Battery life | |
| ▪ 4 pcs. AA alkaline batteries AA, 1,5 V, 2700 mAh | approx. 2 years (100 uses per day) |
| Recommended flow pressure | 0,1 - 0,6 MPa |
| Rate of flow | 12 l/min. (inf. data) |
| Water inlet | male thread G 3/4" |
| Water outlet | male thread G 3/4" |

Supply Specification

| | | |
|-----------------|--------------------|---|
| SLS 02P | - Supply No. 12022 | stainless steel cover with electronics, stainless steel mounting box with brass screw coupling, electromagnetic valve, ball valve and mixer, 4 pcs. AA alkaline batteries |
| SLS 02PB | - Supply No. 12023 | 1,5 V 2700 mAh (SLS 02PB) |

Recommended Accessories

| | | |
|----------------|--------------------|--|
| SLZ 01Y | - Supply No. 05012 | power supply 24 V DC for operating of max. 5 pcs. of showers |
| SLZ 01Z | - Supply No. 05011 | power supply 24 V DC for operating of max. 9 pcs. of showers |
| SLZ 04Y | - Supply No. 05042 | power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers |
| SLZ 04Z | - Supply No. 05041 | power supply 24 V DC for DIN rail, for operating of max. 9 pcs. of showers |
| SLZ 04X | - Supply No. 10049 | power supply 24 V DC for DIN rail, for operating of max. 15 pcs. of showers |
| SLZ 06 | - Supply No. 05060 | power supply 24 V DC for operating of max. 1 pcs. of showers |
| SLD 04 | - Supply No. 07040 | remote control for an adjustment of parameters |
| SLA 03 | - Supply No. 06030 | vandal-proof shower head with possibility to set an angle of water flow |
| SLA 13 | - Supply No. 06130 | vandal-proof shower head with possibility to set an angle of water flow |
| SLA 14 | - Supply No. 06140 | vandal-proof shower head |
| SLA 39 | - Supply No. 06390 | vandal-proof shower head |
| SLA 40 | - Supply No. 06400 | vandal-proof shower head with possibility to set an angle of water flow |
| SLA 36 | - Supply No. 06360 | set of 4 pcs. alkaline batteries AA, 1,5 V, 2700 mAh (for models with index B) |