

# Coin and Token Shower Timers for One Shower


## SLZA 03MZ



### Characteristics

- hygienic flush
- vandal-proof
- direct control
- after inserting a coin or token, the machine starts the water in the shower
- 30 s before the end of water supply the user is warned by interrupting of water flow
- the device adds up the coins but does not return
- recessed
- parameters adjustment using by the remote control SLD 05 (adjustment of shower time according to the thrown coin or token, time delay of switch on, possible activation of hygienic flush, current euro exchange, token value)
- lockable
- for indoor use, temperature range +5 to +40 °C
- material stainless steel AISI 304 (1.4301)
- brushed finish

### Installation Drawing

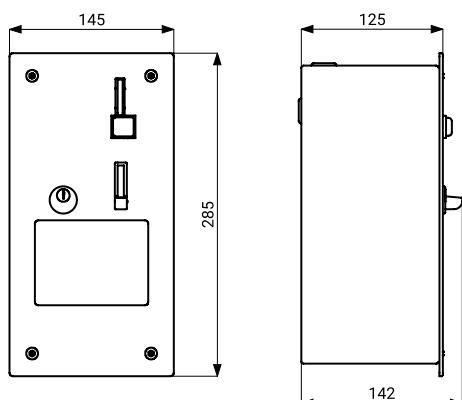

### Technical Specification

Niche dimensions	265 x 127 x 125 mm
Dimensions	285 x 145 x 142 mm
Weight	6,2 kg
Thickness of material	1,5 mm
Operating voltage	24 V DC
Power input	10 W (2,5 W in sleep mode)
Accepted coins	1 and 2 €, token (other currencies on request)
Switch on delay	0 - 300 sec., standard
Showering time	30 sec. 5 - 1200 sec.

### Supply Specification

SLZA 03MZ - Supply No. 88032 stainless steel coin device with electronics, coin holder and coin box, set of keys (2 pcs.), mounting frame

### Required Accessories



SLZA 20

88200

Shower control without piezo button  
- premixed water



SLZA 20H

88205

Shower control without piezo button  
- for cold and hot water, temperature regulated by mixer

**SLZA 20T****88206**

Shower control without piezo button  
- for cold and hot water, temperature regulated  
by thermostatic mixer

- *thermostatic valve nut spanner SLA 64*

**SLZA 21****88210**

Stainless steel shower panel without piezo  
button - premixed water

**SLZA 21H****88215**

Stainless steel shower panel without piezo  
button - cold and hot water, temperature  
regulated by mixer

**SLZA 21T****88216**

Stainless steel shower panel without piezo  
button - for cold and hot water, temperature  
regulated by thermostatic mixer

## Recommended Accessories

SLZ 01Y	-	<b>Supply No. 05012</b>	power supply 24 V DC for operating of max. 1 pc. of shower
SLZ 01Z	-	<b>Supply No. 05011</b>	power supply 24 V DC for operating of max. 3 pcs. of showers
SLZ 04Y	-	<b>Supply No. 05042</b>	power supply 24 V DC for DIN rail, for operating of max. 1 pc. of shower
SLZ 04Z	-	<b>Supply No. 05041</b>	power supply 24 V DC for DIN rail, for operating of max. 3 pcs. of showers
SLZ 04X	-	<b>Supply No. 10049</b>	power supply 24 V DC for DIN rail, for operating of max. 5 pcs. of showers
SLD 05	-	<b>Supply No. 07050</b>	remote control for an adjustment of parameters
SLA 64	-	<b>Supply No. 06640</b>	thermostatic valve nut spanner (SLZA 20T)
SLZA 50	-	<b>Supply No. 88500</b>	set of 50 pcs. of tokens for coin device