

Infrared urinal flush valve with ALS electronics SLP 02KZX




Characteristics



- includes Bluetooth control
(paid Sanela control app available for download)
- responds to the presence of a person in front of the urinal at a distance max 0.7 m from the sensor for longer than 7.5 s
- flushing occurs after the person leaves the detected zone
- flush time is adjustable from 0.5 to 15.5 s
- parameter settings and communication with the electronics via Sanela control app (Bluetooth) or the SLD 03
- automatic flushing 24 hours after the last valve activation
- possibility to regulate water flow with a ball valve
- brushed finish

Building preparation

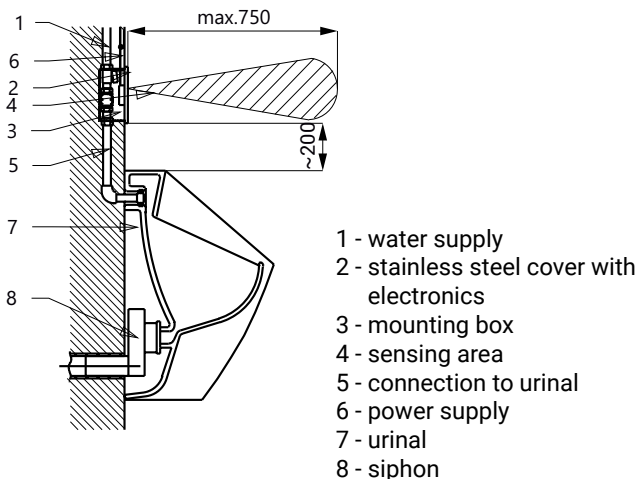

Technical Specification

Stainless steel cover dimensions	170 x 170 x 10 mm
Mounting box dimensions	140 x 140 x 75 mm
Supply voltage	230 V AC/50 Hz
Power input	7 W
Range	0,6 - 0,75 m
Recommended working pressure	0.1 - 0.6 MPa
Flow rate	18 l/min (informative value)
Water inlet	external thread G 3/4"
Water outlet	external thread G 3/4"

Supply specification

SLP 02KZX - Supply No. 11022 stainless steel cover with electronics including Bluetooth module, plastic installation box with union, solenoid valve and ball valve, power supply

Recommended accessories

SLZ 01Y - Supply No. 05012	power supply 24 V DC for max. 5 flushers
SLZ 01Z - Supply No. 05011	power supply 24 V DC for max. 9 flushers
SLZ 04Y - Supply No. 05042	power supply 24 V DC for DIN rail, for max. 5 flushers
SLZ 04Z - Supply No. 05041	power supply 24 V DC for DIN rail, for max. 9 flushers
SLZ 04X - Supply No. 10049	power supply 24 V DC for DIN rail, for max. 15 flushers
SLZ 06 - Supply No. 05060	power supply 24 V DC for max. 1 flusher
SLD 03 - Supply No. 07030	remote control for an adjustment of parameters
SLA 02 - Supply No. 06020	inlet fitting with gasket for water supply to urinals with rear inlet
SLR 02 - Supply No. 08020	frame for plasterboard for urinal and flush valve, which is located in the space above the urinal
SLR 22 - Supply No. 08220	frame for plasterboard structures, for anchoring to the floor and rear wall, for mounting ceramic urinals and stainless steel urinals (SLPN 07, SLPN 09) and for flushers (SLP 02) with sensor located above the urinal
SANELA CONTROL APP	paid Sanela Control app available for download on the App Store and Google Play